


Dimensions(mm)

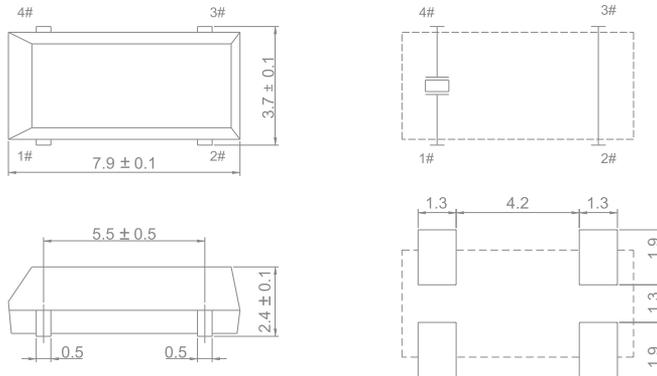

Do not connect to external with 2# and 3#

**GENERIC SPECIFICATION**

ITEM		QTS8 SMD8038	REMARK
Nominal Frequency Range		32.768KHz	
Frequency tolerance @ 25°C		±5ppm to ±20 ppm	Others are offered
Load Capacitance		6pF~12. 5pF	Please specify
Turn Over Temperature		25°C ±5°C	
Temperature Coefficient		-0.04 x 10 <sup>-6</sup> / °C <sup>2</sup>	
Temperature Range	Storage Temp.	-40°C~ +85°C	
	Operating Temp.	-10°C~ +60°C to -40°C~ +85°C	
Drive Level		1.0uW	
Soldering Condition		Under 230°C ±5°C within 5 sec.	
Equivalent Series Resistance		50KΩ max	
Shunt Capacitance		1.55 pF	Typical
Insulation Resistance		More than 500MΩ @ DC 100V	
Aging		First year ±3ppm	